


F33 GEAR PUMP

■ RGPD - F33 DOUBLE GEAR PUMP

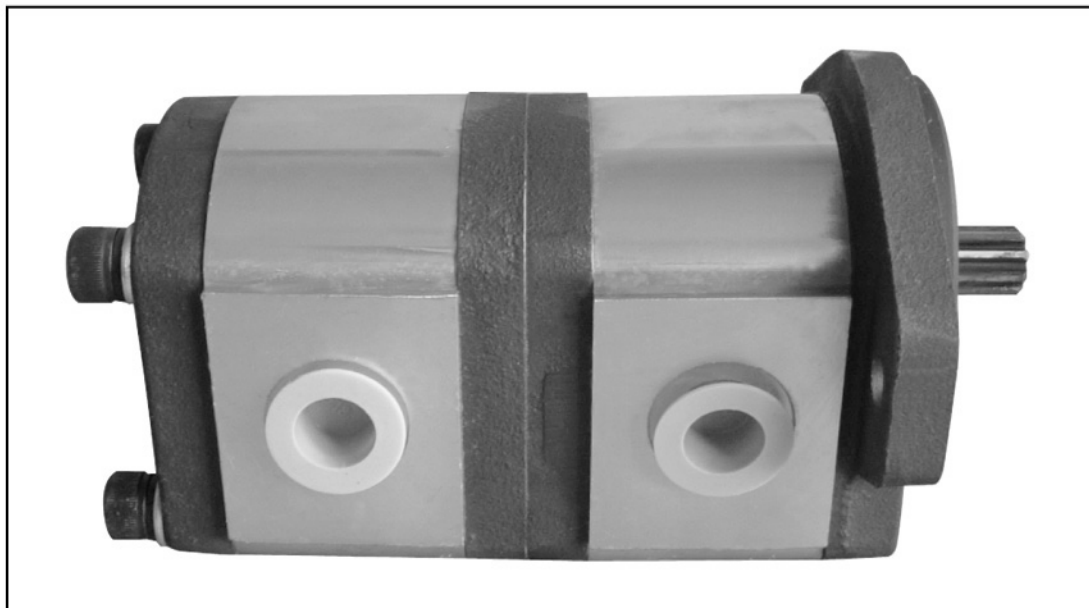

HOW TO ORDER

RGPD - F33 - * * / * * - R * * * *

• Double Gear Pump

• Series Number

• Nominal Discharge
shaft side / back side
4,6,8,10,12,14,16
18,20,23,25,28,30 ml/rev

• Rotation (from shaft side)
R: clock wise
L: anti-clock wise


• Cover
Omit: aluminum
C : casting iron

• In / Outlet Port
Omit: thread
F : flange

• Mounting Flange
Omit: 2 bolt
S : 4 bolt

• Shaft Type
Omit: Ø15.88 square key
19: Ø19.05 square key
S* : SAE * spline

F33 GEAR PUMP

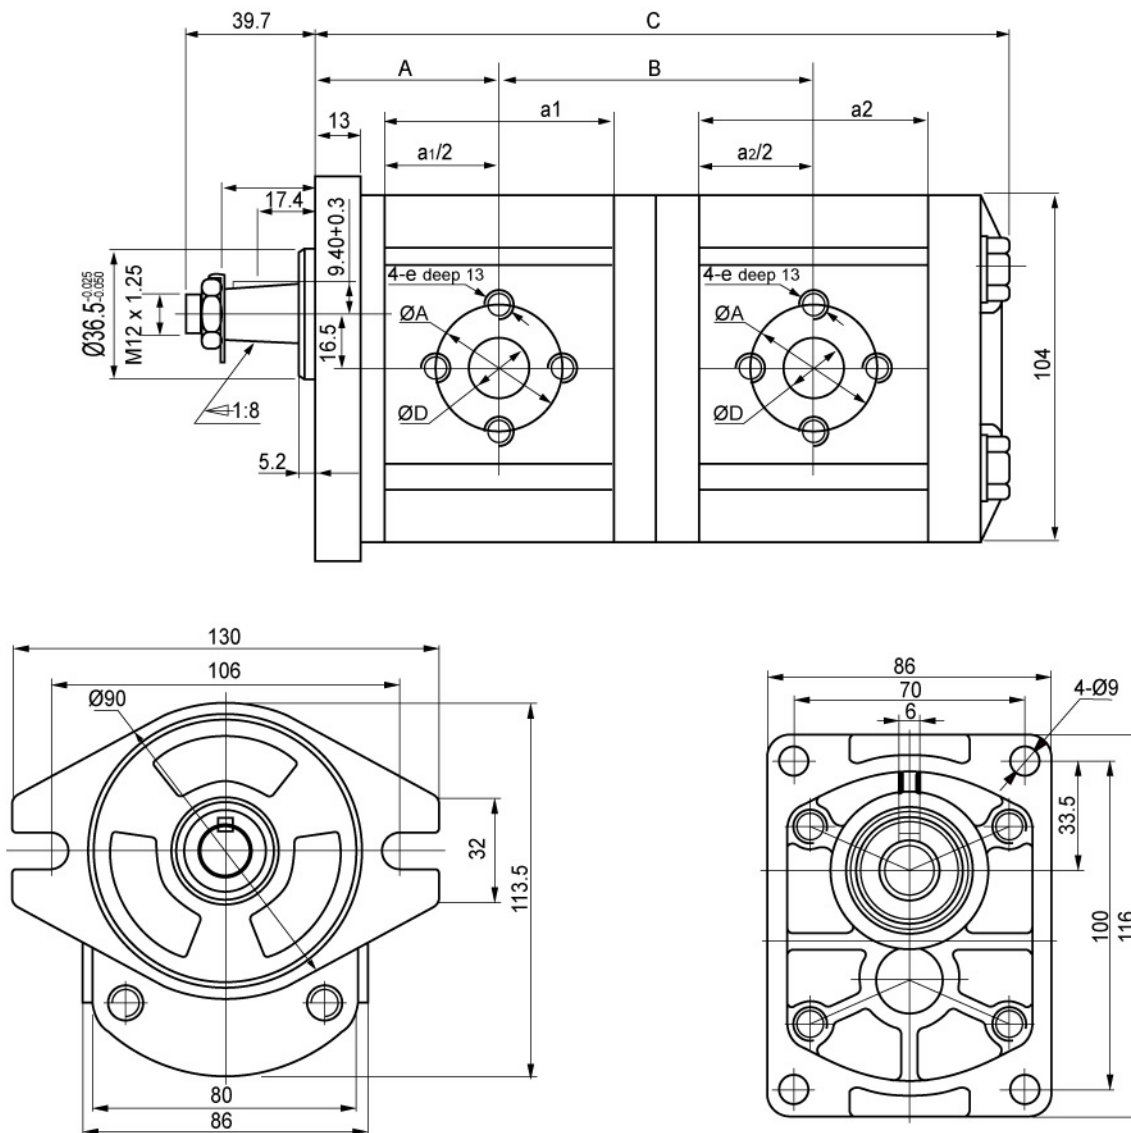

INSTALLATION DIMENSIONS

Discharge ml/rev	a1 a2	FLANGE INLET			FLANGE OUTLET		
		ØD	ØA	e	ØD	ØA	e
4	52	13	30	M6	13	30	M6
6	54						
8	57.5						
10	60	20	40	M8			
12	64						
14	66						
16	70						
20	76						
25	84	22					

MODEL	A	B	C
RGPD-F33- ** / ** -R	19+a1/2	26+a1/2+a2/2	68.5+a1+a2