


KYB

H Y D R A U L I C S
H Y D R A U L I C S
H Y D R A U L I C S
H Y D R A U L I C S
H Y D R A U L I C S
H Y D R A U L I C S
H Y D R A U L I C S
H Y D R A U L I C S
H Y D R A U L I C S

LOAD SENSING HYDRAULIC PUMP FOR MINI-EXCAVATORS

PSVL-42

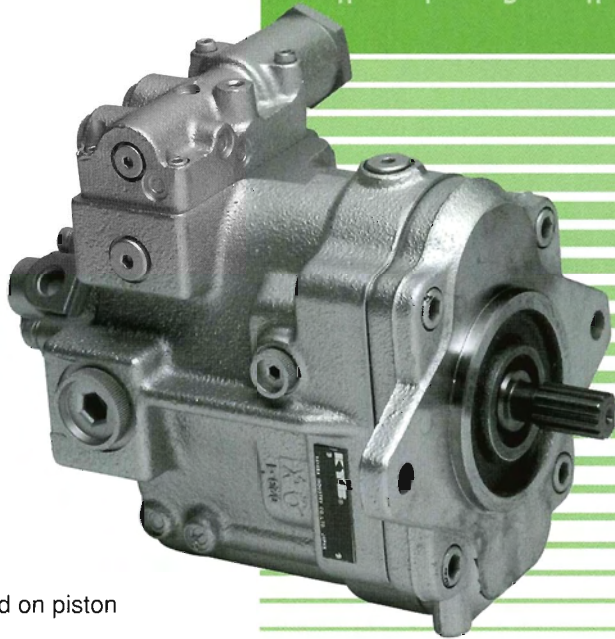

FEATURES


- Pilot pump is installed on piston pump case
- Common suction system for piston and pilot pumps
- No drain hose is needed
- Low noise with cradle type swash plate
- Proportional LS (Load Sensing) control pressure to engine speed

KAYABA INDUSTRY CO., LTD.

SPECIFICATIONS

Model	Displacement	Max. Pressure	Max. Speed	Weight
	cm ³ /rev	MPa	rpm	kg
PSVL-42	42	Allowable 24.5	2500	30

PROPORTIONAL "LS" CONTROL PRESSURE

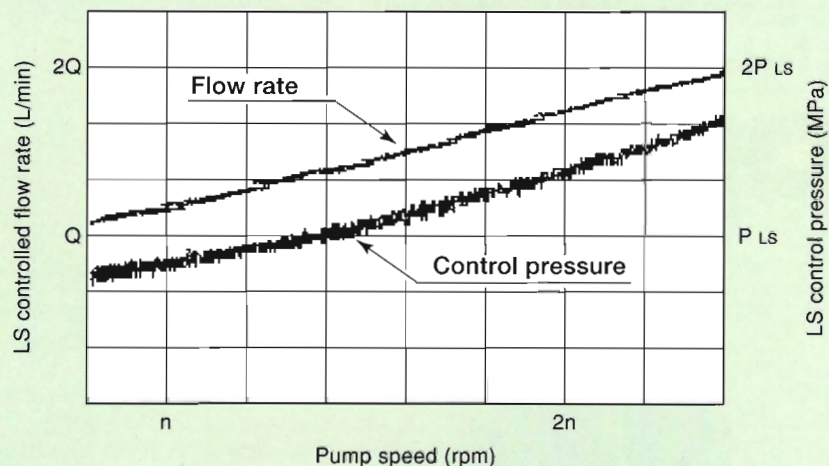

LOAD SENSING HYDRAULIC PUMP FOR MINI-EXCAVATORS

PSVL-42

MODEL INFORMATION

PSV **L** - **42**

Max, Displacement

Load Sencing

Pump Model

KAYABA INDUSTRY CO., LTD.

www.kyb.co.jp

HEAD OFFICE: WORLD TRADE CENTER BLDG.,
4-1, HAMAMATSU-CHO 2-CHOME,
MINATO-KU, TOKYO 105-6111 JAPAN

TELEPHONE 81-3-3435-3581
TELEFAX 81-3-3436-2908

U.S.A.OFFICE: **KYB AMERICA LLC**
140 NORTH MITCHELL CT.,
ADDISON, IL60101, U.S.A.

TELEPHONE 1-630-620-5555
TELEFAX 1-630-620-8133
www.kyb.com

EUROPE OFFICE: **KAYABA INDUSTRY CO., LTD.**
EUROPE BRANCH

KIMPLER STRASSE 336,
D-47807 KREFELD, F. R. GERMANY
TELEPHONE 49-2151-93143-50
TELEFAX 49-2151-93143-30